

\*\*\* READ & SAVE THESE INSTRUCTIONS \*\*\*  
MODEL: 20661; 20662  
(INSTALLATION & OPERATION INSTRUCTIONS)

(1) TOOLS AND MATERIALS REQUIRED

- ❖ BLADE & PHILIPS SCREW DRIVER
- ❖ ADJUSTABLE WRENCH
- ❖ STEP LADDER
- ❖ WIRE CUTTERS
- ❖ WIRING SUPPLIES AS REQUIRED BY ELECTRICAL CODE
- ❖ 2,3x A-19/60W Bulb (model dependant)

*Attention:*

*Before assembling your lighting fixture, please read the following instructions. If you feel you do not have sufficient electrical experience, refer to a do-it-yourself wiring handbook or have your fixture installed by a qualified licensed electrician.*

(2) GENERAL

1. To ensure the success of the installation, be sure to read these instructions and review the diagrams thoroughly before beginning
2. All electrical connections must be in accordance with local codes, ordinances, or the National Electrical Code. If you are unfamiliar with methods of installing electrical wiring, secure the services of a qualified licensed electrician
3. These fixtures are intended for mounting to a standard 4" x 2 1/4" deep metal octagon J-box. The box must be directly supported by the building structure and UL recognized
4. Before commencing with the installation, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box. Turning the power off using the light switch is not sufficient to prevent electrical shock

*NOTE:*

*The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care are factors that cannot be built into any product. These factors must be supplied by the person(s) caring for and operating the fixture.*

(3) UNPACKING THE FIXTURE

On checking the contents of the box you will find,

- ❖ Mounting Hardware Package
- ❖ Glass Diffuser
- ❖ Fixture Assembly

(4) PREPARING THE FIXTURE

*Refer to figure 1 for illustration of fixture parts and assembly.*

1. If you are replacing an existing fixture, disconnect and remove the old fixture. Expose the supply wiring from the J-box.
2. Attach the supplied screws (3) to the crossbar (2) and fasten the crossbar to the junction box (1) with supplied screws (3).
3. Attach the ground wire (4) from the fixture to the junction box ground terminal or (to the box ground wire). secure both the fixture ground wire (4) and the box ground wire directly with the supplied wire connector (5). connect the fixture wires to the appropriate electrical supply wires from the junction using the supplied wire connectors (5). secure wire connectors (5) with UL listed electrical tape. Tuck wires carefully into junction
4. Insert nipple (6) into center hole of crossbar and adjust to desired length.
5. Fasten hex nut (7) to nipple until nipple no longer moves.
6. Slide canopy (8) over nipple and place flat washer (12) onto nipple. Secure by placing decorative cap (9) on nipple and tightening
7. Turn on electricity after assembling the bulbs, if the electricity can work normally. ( make sure the bulbs can work )
8. Loosen nuts on clips (11) as shown in drawing A1 place shade (10) on canopy and tighten clips as shown in drawing A2.
9. Restore electricity and check the operation of your new lighting fixture.

**CAUTION:**


- *Ensure that the Fitting is Cool and Switched off, Before Changing Bulbs.*
- *Do Not use Bulbs Exceeding Maximum Wattage, As Per Caution Label.*
- *Do Not Touch the Bulb while fixture is in operation.*
- *Do Not Operate the Lighting Fixture close to any Combustible Material.*

PLEASE SEE DIAGRAM ON REVERSE SIDE OF PAGE

a c c e s s

L I G H T I N G

# FIGURE

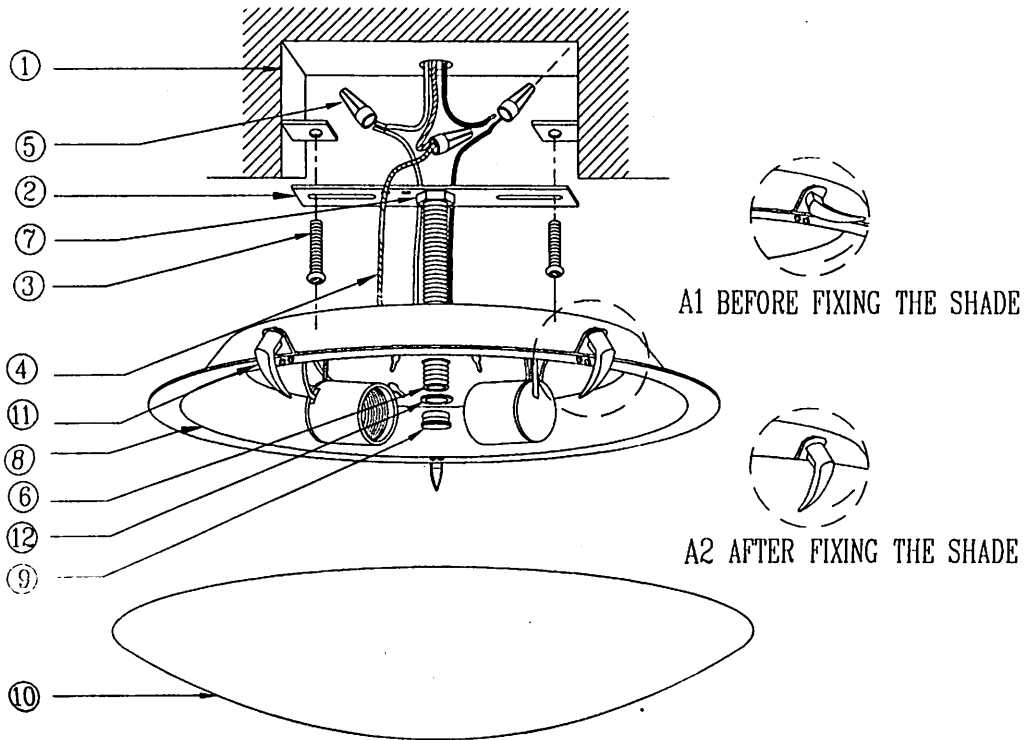

① OUTLET BOX IN THE BUILDING

② CROSSBAR 1PC

③ SCREWS 2PCS

④ FIXTURE GROUND WIRE

⑤ WIRE CONNECTORS 3PCS

⑥ NIPPLE 1PC

⑦ HEX NUT 1PC

⑧ CANOPY

⑨ DECORATIVE CAP 1PC

⑩ SHADE

⑪ CLIPS 3PCS

⑫ FLAT WASHER 1PC