

# access

L I G H T I N G

## INSTALLATION INSTRUCTIONS

### IMPORTANT

Before assembling your **ACCESS LIGHTING** fixture, please make sure that you carefully read through these instruction sheets. Consider having your fixture installed by a qualified licensed electrician.



**NOTE:** The important safeguards and instructions that appear in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care, are factors that can't be built into any product. These factors must be supplied by the person(s) caring for and operating the fixture.

### GENERAL INFORMATION

All electrical connections must be in accordance with all ordinances, Local and National Electrical Codes. These fixtures are intended for mounting to a standard 4" x 2 1/2" metal octagon outlet box. The box must be directly supported by the building structure and U.L. Recognized.

### STEP BY STEP INSTRUCTIONS

Before starting your installation disconnect the Power by turning off the Circuit Breaker or by removing the fuse at the fuse box. Just turning the light off at the light switch is not sufficient to prevent electrical shock.

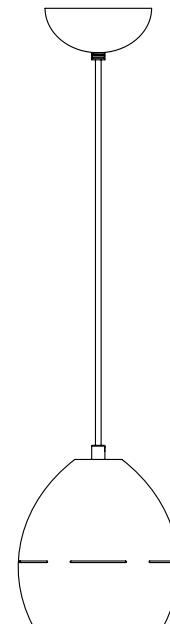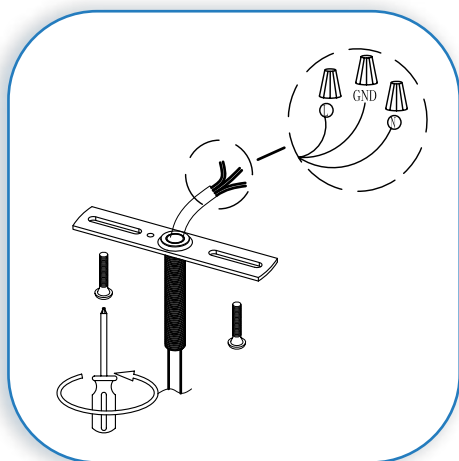

### COLLECTION

ESSENCE

### APPLICATION

Pendant Fixture

### MODEL NO.

28094

### WHAT WE PROVIDE

- Fixture Assembly
- Mounting Hardware
- 10" Wire with lamp holder

### WHAT YOU NEED

- Screwdriver
- Wire Cutters
- Wiring Supplies as Specified by Electrical Code
- 1x 75W E26 A19 bulb

### MOUNT CROSSBAR AND CONNECT WIRES

1


If there is an existing fixture remove it. Expose the supply wires from the J-box. Install the crossbar and mount it to the J-Box with the supplied screws.

Connect the black supply wire to the black fixture wire.

Secure with the supplied wire nuts. Connect the white supply wire to the white fixture wire. Secure with the supplied wire nuts. Either wrap the green wire around one of the protruding screws or connect it to the supply ground.

Secure all wires with electrical tape (not supplied).

Tuck all wires carefully into the J-Box.

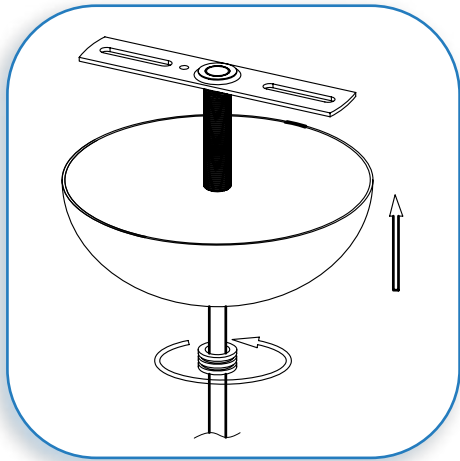

2

**MOUNT THE CANOPY**


Fit the fixture canopy up to the crossbar.  
Secure with the supplied screw nut.



3

**INSERT THE BULB**

Insert the bulb.  
MAXIMUM WATTAGE 75W.  
DO NOT EXCEED THE RECOMMENDED WATTAGE AS  
STATED ON THE WARNING LABEL AND  
INSTRUCTION SHEETS.

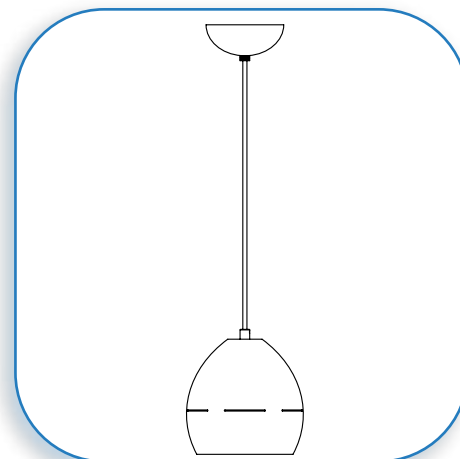

4

**RESTORE THE ELECTRICITY AND  
CHECK THE OPERATION OF YOUR  
NEW ACCESS LIGHTING FIXTURE**

**CAUTION**

Please ensure that the fitting is cool and switched off before replacing the bulb. DO NOT use bulbs that exceed the maximum wattage, stated on caution label.