

# access

LIGHTING

## INSTALLATION INSTRUCTIONS



<b>COLLECTION</b>	<b>APPLICATION</b>	<b>MODEL NO.</b>
Ice	Ceiling Pendant	50543

### IMPORTANT

Before assembling your ACCESS LIGHTING fixture, please make sure that you carefully read through this instruction sheet. Save this instruction sheet and refer to it when additions to or changes in the fixture configuration are made.

Enregistrer cette feuille d'instructions et de s'y référer lorsque les ajouts ou changements dans la configuration de montage sont faites

Consider having your fixture installed by a qualified licensed electrician.

**NOTE:** The important safeguards and instructions that appear in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care are factors that can't be built into any product. These factors must be supplied by the person(s) caring for and operating the fixture

### GENERAL INFORMATION

All electrical connections must be in accordance with all ordinances, Local and National Electrical Codes. These fixtures are intended for mounting to standard 4" x 2 1/2" metal octagon outlet box. The box must be directly supported by the building structure and U.L Recognized

### STEP-BY-STEP INSTRUCTIONS

Before starting your installation disconnect the Power by turning off the Circuit Breaker or by removing the fuse at the fuse box. Just turning the light off at the light switch is not sufficient to prevent electrical shock.

### IMPORTANT SAFETY INSTRUCTION

#### MESURES DE SECURITE A RESPECTURE

Consult a qualified electrician to ensure correct branch circuit conductor.

Consulter un electricien qualifie pour vous assurer que les conducteurs de la derivation sont adequats

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Ce produit doit etre installe selon le code d'installation pertinent, par une personne qui connait bien le produit et son fonctionnement ainsi que les risques inherents

Do not install this fixture in hazardous locations.

N'installez pas cet appareil dans des emplacements dangereux

Do not install fixture assembly closer than 6 inches from any curtain or similar combustible material. Laisser une distance d'au moins 6 pouces entre ce luminaire et la toute surface combustible.

**WARNING:** Risk of Fire and Electric Shock


**CAUTION:** Risque d' Incendie et de Choc Electriques

### WHAT WE PROVIDE

- Crossbar
- Mounting Hardware
- Fixture Mounting Plate
- 1 x Glass Shade
- 1 x Bulb Cover

### WHAT YOU NEED


- Screwdriver
- Wire Cutters
- Wiring Supplies as Specified by the Electrical Code
- 1 x 40W G9 Bulb

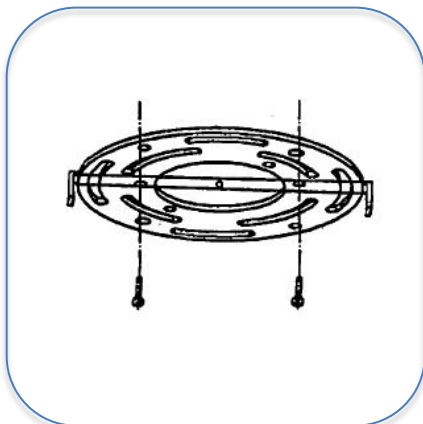

# 1

### PREPARE FIXTURE


If there is an existing fixture remove it. Expose the supply wires from the outlet box. Secure the Crossbar to the J-Box with the U-Shaped arms facing downward. Determine the desired length of your fixture and adjust the wire length by unscrewing the Strain Relief Screw, adjusting the wire length, and retightening the Strain Relief Screw

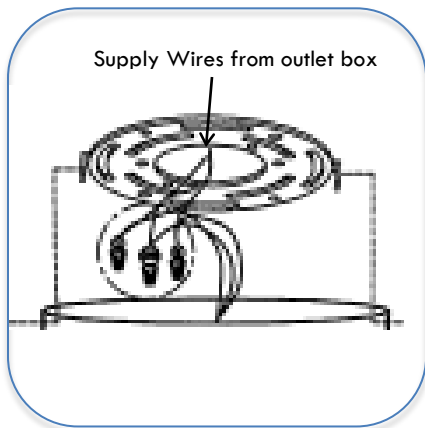

2

**CONNECT THE WIRES**


Gently strip back the clear Outer Wire exposing the three inner wires (1 1/2 inches). Connect the black supply wire to the black fixture wire. Secure with the supplied wire nuts. Connect the white supply wires to the fixture wire. Secure with the supplied wire nuts. Either wrap the outlet box grounding (green) wire around the green hexagonal screw provided on the mounting plate or connect it to the supply ground wire provided with the fixture. Secure all wires with U.L Certified electrical tape (not supplied).

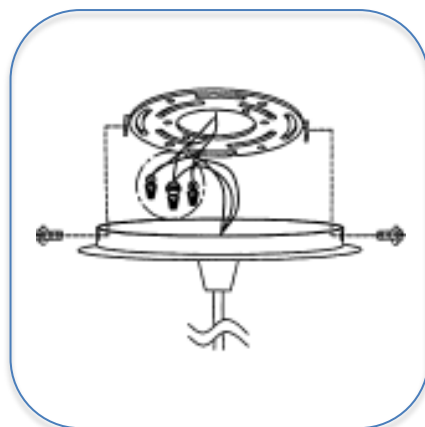

3

**MOUNT THE CANOPY**

Position the Fixture Canopy over the Crossbar aligning the holes on the U-Shaped arms with the holes in the in the sides of the Fixture Canopy. Secure with the supplied Screws

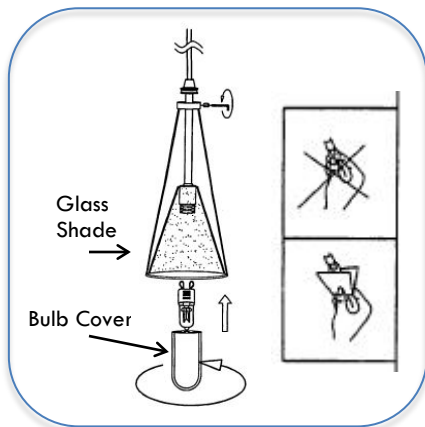

4


**SECURE THE GLASS SHADE**

Insert the Socket into the center of the Glass Shade. Secure by twisting the Glass Shade in a clockwise direction and securing onto the threaded metal piece at the end of the wire (top of the socket rod). Insert the bulb.

**Do not exceed the wattage stated on the warning label.**

**Ensure that a soft cloth is used to handle the bulb.**

Fit the Bulb Cover over the Socket. Secure by screwing onto the threaded portion of the Socket.

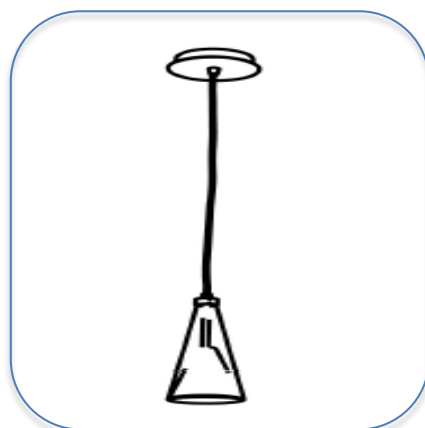

5

**RESTORE THE ELECTRICITY AND CHECK THE OPERATION OF YOUR NEW ACCESS LIGHTING FIXTURE**

**CAUTION**

Please ensure that the fitting is cool and switched off before replacing the bulb. DO NOT use bulbs that might exceed the maximum wattage as stated on caution label.